

Resolution No. 2025-04

**A RESOLUTION AUTHORIZING THE PURCHASE OF THREE (3)
SLR5700 REPEATER UHF UNITS FOR THE CITY OF OSCEOLA PUBLIC
SAFETY COMMUNICATION SYSTEMS.**

Whereas, the City of Osceola recognizes the critical importance of maintaining reliable communication systems for its public safety departments, including police and fire services; and

Whereas, one existing repeater in the communication system has failed, and another is currently in a state of failure, thereby compromising the effectiveness and safety of emergency response operations; and

Whereas, the SLR5700 REPEATER UHF is identified as a suitable replacement to ensure uninterrupted communication for both the police and fire departments; and

Whereas, the purchase of three (3) such repeaters will provide for the replacement of the failed and failing units, which were installed in 2012.


Now, Therefore, Be It Resolved by the City Council of the City of Osceola, Arkansas:


The City Council hereby approves the purchase of three (3) SLR5700 REPEATER UHF (400-470) 1-50W units to replace the failed and failing communication repeaters and to enhance the city's communication infrastructure.

The Mayor and City Clerk are authorized and directed to execute all documents necessary to complete the purchase and installation of these repeaters.

This resolution shall be in full force and effect from and after its adoption.

PASSED AND APPROVED THIS 18TH DAY OF FEBRUARY 2025.


Joe Harris Jr., Mayor

ATTEST

Jessica Griffin, City Clerk



Arkansas Valley Communications



MOTOROLA SOLUTIONS

Radio Solutions Channel Partner

870-336-2864

2813 South Caraway Rd., Jonesboro, AR 72404

888-477-2346

QUOTATION

OSCEOLA PD-JB

303 W. HALE AVE
OSCEOLA, AR 72370

Quotation: 7103

Date: 1-17-2025

Salesperson: David Snyder
dsnyder@avc-wireless.com

Qty	Description	Price	Extended
3	SLR5700 REPEATER UHF (400-470) 1-50W		
Cost of above item(s):		4750.00	14250.00

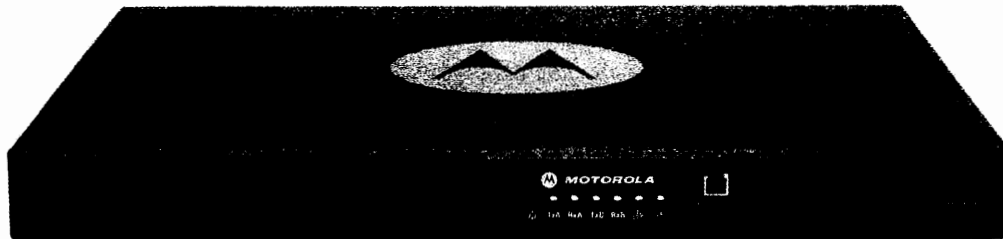
Package Price:	14250.00
Sales Tax:	1425.00
Subtotal:	15675.00
Fees:	0.00
Total:	15675.00

NOTES:

Quotation valid for 30 days unless otherwise specified.

Quotation Accepted By:

Date:



MOTOTRBO™ SLR 5000 SERIES REPEATER

For your business to be successful, you need dependable voice and data communications that reach every corner of your operations. The MOTOTRBO SLR 5000 Series repeater delivers high performance, high reliability two-way radio service with all the features you need to connect your workplace.

With its sleek form factor and low power consumption, it's engineered for low cost of ownership. And with a huge leap forward in technology, it represents the next generation in repeaters.

Versatile and powerful, MOTOTRBO combines the best of two-way radio functionality with the latest digital technology. It integrates voice and data seamlessly, offers advanced features that are easy to use and delivers increased capacity to meet your communication needs from the field to the factory floor.

Whether you need the simplicity of a single site conventional system, or the powerful trunking capabilities of Capacity Plus, Linked Capacity Plus or Connect Plus, the SLR 5000 Series delivers the power of digital two-way radio to your workforce. It can also operate as an analog repeater (conventional or MPT 1327), or as a mixed mode analog/digital repeater while you transition away from a legacy analog system.

PRODUCT DATA SHEET

MOTOTRBO™ SLR SERIES REPEATER

NEW GENERATION MOTOTRBO REPEATER

The SLR 5000 Series represents a huge leap forward in design and technology. Based on a wealth of field experience, customer feedback and technological innovation, the product delivers outstanding performance and efficiency for your business two-way radio system. From rock-solid reliability to clever touches like an integrated battery charger, the SLR 5000 Series is truly the next generation in repeaters.

24/7 PERFORMANCE

The SLR 5000 Series is designed to offer round-the-clock reliable operation, even at its continuous full transmit power of 50W. The high-quality design has been validated through Motorola's Accelerated Life Testing (ALT) program, and meets stringent quality criteria.

To deliver reliable coverage throughout your business premises, the product has a next-generation receiver design, with high sensitivity and improved noise blocking. Combined with the 50W transmit output power and digital error correction, this gives you clear voice quality, even in the most adverse conditions.

The SLR 5000 Series supports the full MOTOTRBO feature set, and is compatible with all the MOTOTRBO system architectures: single site conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus and Connect Plus. The IP interface allows you to build applications and consoles directly into your system.

To help you build your system for top performance, MOTOTRBO RF Planning and IP Integration Services are available for purchase.

WITH EFFICIENCY

The latest RF technology gives the SLR 5000 Series exceptionally good power efficiency. Together with its space-efficient 1U height and low thermal footprint, it gives you a very low cost of ownership.

The product has simple servicing requirements, with field-replaceable Power Amplifier, Power Supply and Modem modules. A front panel USB port allows easy configuration, with optional support for remote management. It also has built-in features such as a 3A battery charger, external alarm ports and an auxiliary power output to ease site installation.

The standard warranty is 2 years, and can be enhanced with Service from the Start: a full service support program that protects your hardware investment with prioritized expert repair, proactive technical support, software updates and more.

DESIGNED FOR THE FUTURE

Motorola is committed to supporting you with even more sophisticated workforce communication solutions as your needs evolve, so the SLR 5000 Series is designed with the future in mind. Compared to first generation repeaters, it has 10x more processing power, 15x more memory and 125x more data storage. The architecture even has provision for expansion modules, should more functionality be required in the future.

MOTOTRBO SLR 5000 SERIES

With excellent performance, high reliability and clever design in a small, slim unit, the SLR 5000 Series repeater is at the heart of a MOTOTRBO professional two-way radio system. To find out more, please contact your local authorized Motorola Channel Partner.



PRODUCT DATA SHEET
MOTOTRBO™ SLR SERIES REPEATER

GENERAL SPECIFICATIONS

	VHF	UHF
Frequency Range	136-174 MHz	400-470 MHz
Channel Capacity	64	
RF Output Power	1-50 W	
Dimensions (H x W x D)	1.75 x 19 x 14.6 in (44 x 483 x 370 mm)	
Weight	19 lbs (8.6 kg)	
Input Voltage (AC)	100-240 Vac, 47-63 Hz	
Current (standby), 110 / 240 V	0.18 / 0.25 A	
Current (transmitting), 110 / 240 V	1.5 / 0.9 A	
Input Voltage (DC)	11.0-14.4 Vdc	
Current (standby)	0.7 A	
Current (transmitting)	9.5 A	
Operating Temperature Range	-22 to +140 °F (-30 to +60 °C)	
Humidity	RH of 95%, non-condensing at 50 °C (122 °F)	
Max Duty Cycle	100%	
FCC Description	ABZ99FT3094	ABZ99FT4096
IC Description	109AB-99FT3094	109AB-99FT4096
Digital Vocoder Type	AMBE+2™	
Battery Charger Capacity	12 V, 3 A	
Connectivity	Tx (N female), Rx (BNC female), USB A receptacle, 2x Ethernet	
Supported System Types	Digital Conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus Analog Conventional, MPT 1327	

RECEIVER

	136-174 MHz	400-470 MHz
Frequency Range	136-174 MHz	400-470 MHz
Channel Spacing	25* / 12.5 kHz	
Frequency Stability	0.5 ppm	
Sensitivity, 12dB SINAD	0.22 µV	
Sensitivity, 5% BER	0.22 µV	
Selectivity (TIA603D), 25* / 12.5 kHz	83 / 55 dB	80 / 55 dB
Selectivity (TIA603), 25* / 12.5 kHz	83 / 68 dB	80 / 68 dB
Selectivity (ETSI), 25* / 12.5 kHz	70 / 63 dB	
Intermodulation Rejection (TIA603D/ETSI)	82 / 73 dB	
Spurious Rejection (TIA603D/ETSI)	95 / 90 dB	
Audio Distortion	< 1%	
Transmitter Hum and Noise, 25* / 12.5 kHz	-45 / 50 dB	

TRANSMITTER

	136-174 MHz	400-470 MHz
Frequency Range	136-174 MHz	400-470 MHz
RF Output Power	1-50 W	
Max Duty Cycle	100%	
Channel Spacing	25* / 12.5 kHz	
Frequency Stability	0.5 ppm	
Intermodulation Attenuation	40 dB	
Adjacent Channel Power (TIA603D), 25* / 12.5 kHz	78 / 62 dB	
Adjacent Channel Power (ETSI), 25* / 12.5 kHz	78 / 62 dB	
Conducted Spurious Emissions	-36 dBm < 1 GHz, -30 dBm > 1 GHz	
Modulation Fidelity (4FSK)	FSK Error 5%, FSK Magnitude 1%	
Audio Response	TIA603D	
Audio Distortion	< 1%	
Receiver Hum and Noise, 25* / 12.5 kHz	-45 / -50 dB	
Rated System Deviation, 25* / 12.5 kHz	±5.0 / ±2.5 kHz	

* 25 kHz channels not available in the US

Availability is subject to individual country law and regulations. All specifications shown are typical unless otherwise stated and are subject to change without notice.

